



US007225712B2

(12) **United States Patent**  
**Gass et al.**

(10) **Patent No.:** **US 7,225,712 B2**  
(45) **Date of Patent:** **Jun. 5, 2007**

(54) **MOTION DETECTING SYSTEM FOR USE IN A SAFETY SYSTEM FOR POWER EQUIPMENT**

(75) Inventors: **Stephen F. Gass**, Wilsonville, OR (US); **Robert L. Chamberlain**, Raleigh, NC (US); **J. David Fulmer**, Tualatin, OR (US); **Joel E. Jensen**, Redwood City, CA (US); **Benjamin B. Schramm**, Los Gatos, CA (US)

(73) Assignee: **SD3, LLC**, Wilsonville, OR (US)

(\*) Notice: Subject to any disclaimer, the term of this patent is extended or adjusted under 35 U.S.C. 154(b) by 896 days.

(21) Appl. No.: **09/929,234**

(22) Filed: **Aug. 13, 2001**

(65) **Prior Publication Data**

US 2002/0017178 A1 Feb. 14, 2002

#### **Related U.S. Application Data**

(60) Provisional application No. 60/225,056, filed on Aug. 14, 2000, provisional application No. 60/225,057, filed on Aug. 14, 2000, provisional application No. 60/225,058, filed on Aug. 14, 2000, provisional application No. 60/225,059, filed on Aug. 14, 2000, provisional application No. 60/225,089, filed on Aug. 14, 2000, provisional application No. 60/225,094, filed on Aug. 14, 2000, provisional application No. 60/225,169, filed on Aug. 14, 2000, provisional application No. 60/225,170, filed on Aug. 14, 2000, provisional application No. 60/225,200, filed on Aug. 14, 2000, provisional application No. 60/225,201, filed on Aug. 14, 2000, provisional application No. 60/225,206, filed on Aug. 14, 2000, provisional application No. 60/225,210, filed on Aug. 14, 2000, provisional application No. 60/225,211, filed on Aug. 14, 2000, provisional application No. 60/225,212, filed on Aug. 14, 2000.

(51) **Int. Cl.**

**B26D 1/14** (2006.01)

**B27B 5/00** (2006.01)

(52) **U.S. Cl.** ..... **83/62.1; 83/471.3; 83/477.1; 83/DIG. 1**

(58) **Field of Classification Search** ..... **83/DIG. 1, 83/62.1, 478, 76.7, 472, 397.1, 398, 932, 83/971.3, 473, 501, 477.1, 526, 491, 58, 83/471.3; 144/427, 391, 356, 384**  
See application file for complete search history.

(56) **References Cited**

#### **U.S. PATENT DOCUMENTS**

146,886 A 1/1874 Doane et al.

(Continued)

#### **FOREIGN PATENT DOCUMENTS**

CH 297525 6/1954

(Continued)

#### **OTHER PUBLICATIONS**

Analog Devices, Inc., 3-Axis Capacitive Sensor—Preliminary Technical Data AD7103, pp. 1-40, © 1998.


*Primary Examiner*—Boyer D. Ashley

*Assistant Examiner*—Ghassem Alie

(57) **ABSTRACT**

A woodworking machine including a detection system adapted to detect a dangerous condition between a person and a working portion of the machine is disclosed. The machine includes a reaction system associated with the detection system to cause a predetermined action to take place relative to the working portion upon detection of the dangerous condition. A motion detection system is adapted to detect motion of the working portion and to disable the reaction system when the working portion is not moving. The motion detection system may include a sensor, such as a Hall effect sensor, an electromagnetic field sensor, an optical sensor, or an electrical sensor. The woodworking machine may take the form of a saw, the working portion may be a blade adapted to cut when spinning, and the dangerous condition may be a person contacting the blade.

**20 Claims, 6 Drawing Sheets**

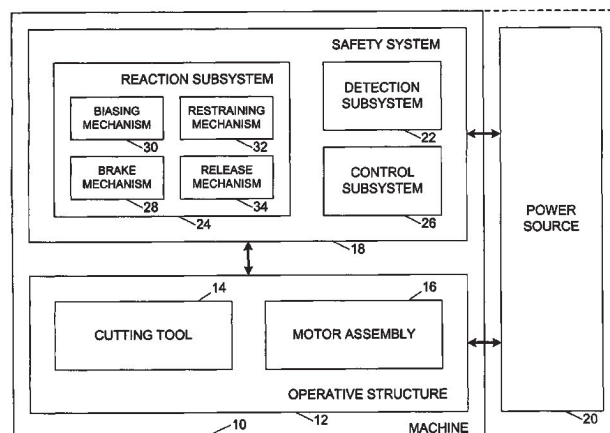

## US 7,225,712 B2

Page 2

U.S. PATENT DOCUMENTS					
162,814	A	5/1875	Graves et al.	2,131,492	A 9/1938 Ocenasek
261,090	A	7/1882	Grill	2,163,320	A 6/1939 Hammond
264,412	A	9/1882	Kuhlmann	2,168,282	A 8/1939 Tautz
299,480	A	5/1884	Kuhlmann et al.	2,241,556	A 5/1941 MacMillin et al.
302,041	A	7/1884	Sill	2,261,696	A 11/1941 Ocenasek
307,112	A	10/1884	Groff	2,265,407	A 12/1941 Tautz
509,253	A	11/1893	Shields	2,286,589	A 6/1942 Tannewitz
545,504	A	9/1895	Hoover	2,292,872	A 8/1942 Eastman
869,513	A	10/1907	Pfeil	2,299,262	A 10/1942 Uremovich
941,726	A	11/1909	Pfalzgraf	2,312,118	A 2/1943 Neisewander
997,720	A	7/1911	Troupenat	2,313,686	A 3/1943 Uremovich
1,037,843	A	9/1912	Ackley	2,328,244	A 8/1943 Woodward
1,050,649	A	1/1913	Harrold et al.	2,352,235	A 6/1944 Tautz
1,054,558	A	2/1913	Jones	2,377,265	A 3/1945 Rady
1,074,198	A	9/1913	Phillips	2,402,232	A 6/1946 Baker
1,082,870	A	12/1913	Humason	2,425,331	A 8/1947 Kramer
1,101,515	A	6/1914	Adam	2,434,174	A 1/1948 Morgan
1,126,970	A	2/1915	Folmer	2,452,589	A 11/1948 McWhirter et al.
1,132,129	A	3/1915	Stevens	2,466,325	A 4/1949 Ocenasek
1,148,169	A	7/1915	Howe	2,496,613	A 2/1950 Woodward
1,154,209	A	9/1915	Rushon	2,509,813	A 5/1950 Dineen
1,205,246	A	11/1916	Mowry	2,517,649	A 8/1950 Frechtman
1,228,047	A	5/1917	Reinhold	2,518,684	A 8/1950 Harris
1,240,430	A	9/1917	Erickson	2,530,290	A 11/1950 Collins
1,244,187	A	10/1917	Frisbie	2,554,124	A 5/1951 Salmont
1,255,886	A	2/1918	Jones	2,562,396	A 7/1951 Schutz
1,258,961	A	3/1918	Tattersall	2,572,326	A 10/1951 Evans
1,311,508	A	7/1919	Harrold	2,590,035	A 3/1952 Pollak
1,324,136	A	12/1919	Turner	2,593,596	A 4/1952 Olson
1,381,612	A	6/1921	Anderson	2,601,878	A 7/1952 Anderson
1,397,606	A	11/1921	Smith	2,623,555	A 12/1952 Eschenburg
1,427,005	A	8/1922	McMichael	2,625,966	A 1/1953 Copp
1,430,983	A	10/1922	Granberg	2,626,639	A 1/1953 Hess
1,464,924	A	8/1923	Drummond	2,661,777	A 12/1953 Hitchcock
1,465,224	A	8/1923	Lantz	2,661,780	A 12/1953 Morgan
1,496,212	A	6/1924	French	2,675,707	A 4/1954 Brown
1,511,797	A	10/1924	Berghold	2,678,071	A 5/1954 Odium et al.
1,526,128	A	2/1925	Flohr	2,690,084	A 9/1954 Van Dam
1,527,587	A	2/1925	Hutchinson	2,695,638	A 11/1954 Gaskell
1,551,900	A	9/1925	Morrow	2,704,560	A 3/1955 Woessner
1,553,996	A	9/1925	Federer	2,711,762	A 6/1955 Gaskell
1,582,483	A	4/1926	Runyan	2,722,246	A 11/1955 Arnoldy
1,600,604	A	9/1926	Sorlien	2,731,049	A 1/1956 Akin
1,616,478	A	2/1927	Watson	2,736,348	A 2/1956 Nelson
1,640,517	A	8/1927	Procknow	2,737,213	A 3/1956 Richards et al.
1,662,372	A	3/1928	Ward	2,758,615	A 8/1956 Mastriforte
1,701,948	A	2/1929	Crowe	2,785,710	A 3/1957 Mowery, Jr.
1,711,490	A	5/1929	Drummond	2,786,496	A 3/1957 Eschenburg
1,712,828	A	5/1929	Klehm	2,810,408	A 10/1957 Boice et al.
1,774,521	A	9/1930	Neighbour	2,844,173	A 7/1958 Gaskell
1,807,120	A	5/1931	Lewis	2,850,054	A 9/1958 Eschenburg
1,811,066	A	6/1931	Tannewitz	2,852,047	A 9/1958 Odium et al.
1,879,280	A	9/1932	James	2,873,773	A 2/1959 Gaskell
1,896,924	A	2/1933	Ulrich	2,883,486	A 4/1959 Mason
1,902,270	A	3/1933	Tate	2,894,546	A 7/1959 Eschenburg
1,904,005	A	4/1933	Masset	2,913,025	A 11/1959 Richards
1,910,651	A	5/1933	Tautz	2,913,581	A 11/1959 Simonton et al.
1,938,548	A	12/1933	Tautz	2,945,516	A 7/1960 Edgemond, Jr. et al.
1,938,549	A	12/1933	Tautz	2,954,118	A 9/1960 Anderson
1,963,688	A	6/1934	Tautz	2,957,166	A 10/1960 Gluck
1,988,102	A	1/1935	Woodward	2,978,084	A 4/1961 Vilkaitis
1,993,219	A	3/1935	Merrigan	2,984,268	A 5/1961 Vuichard
2,007,887	A	7/1935	Tautz	2,991,593	A 7/1961 Cohen
2,010,851	A	8/1935	Drummond	3,005,477	A 10/1961 Sherwen
2,020,222	A	11/1935	Tautz	3,011,529	A 12/1961 Copp
2,038,810	A	4/1936	Tautz	3,011,610	A 12/1961 Stiebel et al.
2,075,282	A	3/1937	Hedgpath	3,013,592	A 12/1961 Ambrosio et al.
2,095,330	A	10/1937	Hedgpath	3,021,881	A 2/1962 Edgemond, Jr. et al.
2,106,288	A	1/1938	Tautz	3,035,995	A 5/1962 Seeley et al.
2,106,321	A	1/1938	Guertin	3,047,116	A 7/1962 Stiebel et al.
2,121,069	A	6/1938	Collins	3,085,602	A 4/1963 Gaskell
				3,105,530	A 10/1963 Peterson
				3,129,731	A 4/1964 Tyrrell

## US 7,225,712 B2

Page 3

3,163,732	A	12/1964	Abbott	4,070,940	A	1/1978	McDaniel et al.
3,184,001	A	5/1965	Reinsch et al.	4,075,961	A	2/1978	Harris
3,186,256	A	6/1965	Reznick	4,077,161	A	3/1978	Wyle et al.
3,207,273	A	9/1965	Jurin	4,085,303	A	4/1978	McIntyre et al.
3,213,731	A	10/1965	Renard	4,090,345	A	5/1978	Harkness
3,224,474	A	12/1965	Bloom	4,091,698	A	5/1978	Obear et al.
3,232,326	A	2/1966	Speer et al.	4,106,378	A	8/1978	Kaiser
3,246,205	A	4/1966	Miller	4,117,752	A	10/1978	Yoneda
3,249,134	A	5/1966	Vogl et al.	4,145,940	A	3/1979	Woloveke et al.
3,306,149	A	2/1967	John	4,152,833	A	5/1979	Phillips
3,313,185	A	4/1967	Drake et al.	4,161,649	A	7/1979	Klos et al.
3,315,715	A	4/1967	Mytinger	4,175,452	A	11/1979	Idel
3,323,814	A	6/1967	Phillips	4,190,000	A	2/1980	Shaull et al.
3,337,008	A	8/1967	Trachte	4,195,722	A	4/1980	Anderson et al.
3,356,111	A	12/1967	Mitchell	4,199,930	A	4/1980	Lebet et al.
3,386,322	A	6/1968	Stone et al.	4,249,117	A	2/1981	Leukhardt et al.
3,439,183	A	4/1969	Hurst, Jr.	4,249,442	A	2/1981	Fittery
3,445,835	A	5/1969	Fudaley	4,262,278	A	4/1981	Howard et al.
3,454,286	A	7/1969	Anderson et al.	4,267,914	A	5/1981	Saar
3,456,696	A	7/1969	Gregory et al.	4,270,427	A	6/1981	Collberg et al.
3,512,440	A	5/1970	Frydmann	4,276,799	A	7/1981	Muehling
3,538,964	A	11/1970	Warrick et al.	4,291,794	A	9/1981	Bauer
3,540,338	A	11/1970	McEwan et al.	4,305,442	A	12/1981	Currie
3,554,067	A	1/1971	Scutella	4,321,841	A	3/1982	Felix
3,566,996	A	3/1971	Crossman	4,372,202	A	2/1983	Cameron
3,580,376	A	5/1971	Loshbough	4,391,358	A	7/1983	Haeger
3,581,784	A	6/1971	Warrick	4,418,597	A	12/1983	Krusemark et al.
3,613,748	A	10/1971	De Pue	4,466,233	A	8/1984	Thesman
3,670,788	A	6/1972	Pollak et al.	4,470,046	A	9/1984	Betsill
3,675,444	A	7/1972	Whipple	4,510,489	A	4/1985	Anderson, III et al.
3,680,609	A	8/1972	Menge	4,512,224	A	4/1985	Terauchi
3,688,815	A	9/1972	Ridenour	4,518,043	A	5/1985	Anderson et al.
3,695,116	A	10/1972	Baur	4,532,501	A	7/1985	Hoffman
3,696,844	A	10/1972	Bernatschek	4,532,844	A	8/1985	Chang et al.
3,745,546	A	7/1973	Struger et al.	4,557,168	A *	12/1985	Tokiwa ..... 83/56
3,749,933	A	7/1973	Davidson	4,560,033	A	12/1985	DeWoody et al.
3,754,493	A	8/1973	Niehaus et al.	4,566,512	A	1/1986	Wilson
3,772,590	A	11/1973	Mikulecky et al.	4,573,556	A	3/1986	Andreasson
3,785,230	A	1/1974	Lokey	4,576,073	A	3/1986	Stinson
3,805,639	A *	4/1974	Peter ..... 74/616	4,589,047	A	5/1986	Gaus et al.
3,805,658	A *	4/1974	Scott et al. .... 83/545	4,589,860	A	5/1986	Brandenstein et al.
3,808,932	A	5/1974	Russell	4,599,597	A	7/1986	Rotbart
3,829,850	A	8/1974	Guetersloh	4,599,927	A	7/1986	Eccardt et al.
3,858,095	A	12/1974	Friemann et al.	4,606,251	A	8/1986	Boileau
3,861,016	A	1/1975	Johnson et al.	4,615,247	A	10/1986	Berkeley
3,863,208	A	1/1975	Balban	4,621,300	A	11/1986	Summerer
3,880,032	A	4/1975	Green	4,625,604	A	12/1986	Handler et al.
3,882,744	A	5/1975	McCarroll	4,637,188	A	1/1987	Crothers
3,886,413	A	5/1975	Dow et al.	4,637,289	A	1/1987	Ramsden
3,889,567	A *	6/1975	Sato et al. .... 83/818	4,644,832	A *	2/1987	Smith ..... 83/72
3,922,785	A	12/1975	Fushiya	4,653,189	A *	3/1987	Andreasson ..... 30/382
3,924,688	A	12/1975	Cooper et al.	4,657,428	A	4/1987	Wiley
3,931,727	A	1/1976	Luenser	4,672,500	A	6/1987	Tholome et al.
3,935,777	A	2/1976	Bassett	4,675,664	A	6/1987	Cloutier et al.
3,945,286	A	3/1976	Smith	4,679,719	A	7/1987	Kramer
3,946,631	A	3/1976	Malm	4,722,021	A	1/1988	Hornung et al.
3,947,734	A	3/1976	Fyler	4,751,603	A	6/1988	Kwan
3,949,636	A	4/1976	Ball et al.	4,756,220	A	7/1988	Olsen et al.
3,953,770	A	4/1976	Hayashi	4,757,881	A	7/1988	Jonsson et al.
3,960,310	A	6/1976	Nussbaum	4,792,965	A	12/1988	Morgan
3,967,161	A	6/1976	Lichtblau	4,805,504	A	2/1989	Fushiya
3,974,565	A	8/1976	Ellis	4,840,135	A	6/1989	Yamauchi
3,975,600	A	8/1976	Marston	4,845,476	A	7/1989	Rangear et al.
3,978,624	A	9/1976	Merkel et al.	4,864,455	A	9/1989	Shimomura et al.
3,994,192	A	11/1976	Faig	4,875,398	A	10/1989	Taylor et al.
4,007,679	A	2/1977	Edwards	4,896,607	A	1/1990	Hall et al.
4,016,490	A	4/1977	Weckenmann et al.	4,906,962	A	3/1990	Duimstra
4,026,174	A	5/1977	Fierro	4,934,233	A	6/1990	Brundage et al.
4,026,177	A	5/1977	Lokey	4,936,876	A	6/1990	Reyes
4,029,159	A *	6/1977	Nymann ..... 173/217	4,937,554	A	6/1990	Herman
4,047,156	A	9/1977	Atkins	4,965,909	A	10/1990	McCullough et al.
4,048,886	A *	9/1977	Zettler ..... 83/58	4,975,798	A	12/1990	Edwards et al.
4,060,160	A	11/1977	Lieber	5,020,406	A	6/1991	Sasaki et al.

## US 7,225,712 B2

Page 4

5,025,175 A	6/1991	Dubois, III	5,921,367 A	7/1999	Kashioka et al.
5,046,426 A	9/1991	Julien et al.	5,930,096 A	7/1999	Kim
5,052,255 A	10/1991	Gaines	5,937,720 A	8/1999	Itzov
5,074,047 A	12/1991	King	5,942,975 A	8/1999	Sorensen
5,081,406 A	1/1992	Hughes et al.	5,943,932 A	8/1999	Sberveglieri
5,082,316 A	1/1992	Wardlaw	5,950,514 A	9/1999	Benedict et al.
5,083,973 A	1/1992	Townsend	5,963,173 A	10/1999	Lian et al.
5,086,890 A	2/1992	Turczyn et al.	5,974,927 A	11/1999	Tsune
5,094,000 A *	3/1992	Becht et al. .... 30/475	5,989,116 A *	11/1999	Johnson et al. .... 452/150
5,119,555 A	6/1992	Johnson	6,018,284 A	1/2000	Rival et al.
5,122,091 A	6/1992	Townsend	6,037,729 A	3/2000	Woods et al.
5,174,349 A	12/1992	Svetlik et al.	6,052,884 A	4/2000	Steckler et al.
5,184,534 A	2/1993	Lee	6,095,092 A	8/2000	Chou
5,198,702 A	3/1993	McCullough et al.	6,119,984 A	9/2000	Devine
5,199,343 A	4/1993	OBanion	6,133,818 A	10/2000	Hsieh et al.
5,201,684 A	4/1993	DeBois, III	6,141,192 A	10/2000	Garzon
5,207,253 A	5/1993	Hoshino et al.	6,148,504 A	11/2000	Schmidt et al.
5,212,621 A	5/1993	Panter	6,150,826 A	11/2000	Hokodate et al.
5,218,189 A	6/1993	Hutchison	6,170,370 B1	1/2001	Sommerville
5,231,359 A	7/1993	Masuda et al.	6,244,149 B1	6/2001	Ceroll et al.
5,231,906 A	8/1993	Kogej	6,257,061 B1	7/2001	Nonoyama et al.
5,239,978 A	8/1993	Plangetis	6,330,848 B1	12/2001	Nishio et al.
5,245,879 A	9/1993	McKeon	6,352,137 B1	3/2002	Stegall et al.
5,257,570 A	11/1993	Shiotani et al.	6,366,099 B1	4/2002	Reddi
5,265,510 A	11/1993	Hoyer-Ellefsen	6,376,939 B1	4/2002	Suzuki et al.
5,272,946 A	12/1993	McCullough et al.	6,404,098 B1	6/2002	Kayama et al.
5,276,431 A	1/1994	Piccoli et al.	6,405,624 B2	6/2002	Sutton
5,285,708 A	2/1994	Bosten et al.	6,418,829 B1	7/2002	Pilchowski
5,320,382 A	6/1994	Goldstein et al.	6,420,814 B1	7/2002	Bobbio
5,321,230 A	6/1994	Shanklin et al.	6,427,570 B1	8/2002	Miller et al.
5,331,875 A	7/1994	Mayfield	6,430,007 B1	8/2002	Jabbari
5,353,670 A	10/1994	Metzger, Jr.	6,431,425 B1	8/2002	Moorman et al.
5,377,554 A	1/1995	Reulein et al.	6,450,077 B1	9/2002	Ceroll et al.
5,377,571 A	1/1995	Josephs	6,453,786 B1	9/2002	Ceroll et al.
5,392,568 A	2/1995	Howard, Jr. et al.	6,460,442 B2	10/2002	Talesky et al.
5,392,678 A	2/1995	Sasaki et al.	6,471,106 B1	10/2002	Reining
5,401,928 A *	3/1995	Kelley ..... 200/510	6,479,958 B1	11/2002	Thompson et al.
5,411,221 A	5/1995	Collins et al.	D466,913 S	12/2002	Ceroll et al.
5,436,613 A	7/1995	Ghosh et al.	6,492,802 B1	12/2002	Bielski
5,451,750 A	9/1995	An	D469,354 S	1/2003	Curtsinger
5,453,903 A	9/1995	Chow	6,502,493 B1	1/2003	Eccardt et al.
5,471,888 A	12/1995	McCormick	6,536,536 B1	3/2003	Gass et al.
5,480,009 A *	1/1996	Wieland et al. .... 188/77 W	6,543,324 B2	4/2003	Dils
5,503,059 A	4/1996	Pacholok	6,546,835 B2	4/2003	Wang
5,510,685 A	4/1996	Grasselli	6,575,067 B2	6/2003	Parks et al.
5,513,548 A	5/1996	Garuglieri	6,578,460 B2	6/2003	Sartori
5,534,836 A	7/1996	Schenkel et al.	6,578,856 B2	6/2003	Kahle
5,572,916 A *	11/1996	Takano ..... 83/74	6,595,096 B2	7/2003	Ceroll et al.
5,587,618 A	12/1996	Hathaway	D478,917 S	8/2003	Ceroll et al.
5,592,353 A	1/1997	Shinohara et al.	6,601,493 B1	8/2003	Croft
5,606,889 A	3/1997	Bielinski et al.	6,607,015 B1	8/2003	Chen
5,623,860 A	4/1997	Schoene et al.	D479,538 S	9/2003	Welsh et al.
5,648,644 A	7/1997	Nagel	6,617,720 B1	9/2003	Egan, III et al.
5,659,454 A	8/1997	Vermesse	6,619,348 B2	9/2003	Wang
5,667,152 A	9/1997	Mooring	6,640,683 B2	11/2003	Lee
5,671,633 A	9/1997	Wagner	6,644,157 B2	11/2003	Huang
5,695,306 A	12/1997	Nygren, Jr.	6,647,847 B2	11/2003	Hewitt et al.
5,700,165 A	12/1997	Harris et al.	6,659,233 B2	12/2003	DeVlieg
5,724,875 A	3/1998	Meredith et al.	6,736,042 B2	5/2004	Behne et al.
5,730,165 A	3/1998	Philipp	6,742,430 B2	6/2004	Chen
5,741,048 A	4/1998	Eccleston	6,796,208 B1	9/2004	Jorgensen
5,755,148 A	5/1998	Stumpf et al.	6,826,988 B2	12/2004	Gass et al.
5,771,742 A	6/1998	Bokaie et al.	6,857,345 B2	2/2005	Gass et al.
5,782,001 A	7/1998	Gray	6,874,397 B2	4/2005	Chang
5,787,779 A	8/1998	Garuglieri	6,874,399 B2	4/2005	Lee
5,791,057 A	8/1998	Nakamura et al.	6,920,814 B2	7/2005	Gass et al.
5,791,223 A	8/1998	Lanzer	6,945,148 B2	9/2005	Gass et al.
5,791,224 A	8/1998	Suzuki et al.	6,945,149 B2	9/2005	Gass et al.
5,791,441 A	8/1998	Matos et al.	2001/0032534 A1	10/2001	Cerroll et al.
5,819,619 A	10/1998	Miller et al.	2002/0096030 A1	7/2002	Wang
5,852,951 A	12/1998	Santi	2002/0109036 A1	8/2002	Denen et al.
5,861,809 A	1/1999	Eckstein et al.	2003/0037655 A1	2/2003	Chin-Chin
5,875,698 A	3/1999	Ceroll et al.	2003/0074873 A1	4/2003	Freiberg et al.

**US 7,225,712 B2**

Page 5

2003/0089212 A1 5/2003 Parks et al.  
 2003/0101857 A1 6/2003 Chuang  
 2003/0109798 A1 6/2003 Kermani  
 2004/0011177 A1 1/2004 Huang  
 2004/0060404 A1 4/2004 Metzger, Jr.  
 2004/0104085 A1 6/2004 Lang et al.  
 2004/0159198 A1 8/2004 Peot et al.  
 2004/0194594 A1 10/2004 Dils et al.  
 2004/0200329 A1 10/2004 Sako  
 2004/0226424 A1 11/2004 O'Banion et al.  
 2004/0226800 A1 11/2004 Pierga et al.  
 2005/0057206 A1 3/2005 Uneyama  
 2005/0092149 A1 5/2005 Hartmann  
 2005/0139051 A1 6/2005 Gass et al.  
 2005/0139056 A1 6/2005 Gass et al.  
 2005/0139057 A1 6/2005 Gass et al.  
 2005/0139058 A1 6/2005 Gass et al.  
 2005/0139459 A1 6/2005 Gass et al.  
 2005/0155473 A1 7/2005 Gass  
 2005/0166736 A1 8/2005 Gass et al.  
 2005/0178259 A1 8/2005 Gass et al.

2005/0204885 A1 9/2005 Gass et al.

**FOREIGN PATENT DOCUMENTS**

DE	76186	8/1921
DE	2800403	7/1979
DE	3427733	1/1986
DE	4235161 A1	5/1993
DE	4326313	2/1995
DE	19609771	6/1998
EP	146460	11/1988
EP	0362937 A2	4/1990
ES	2152184	1/2001
FR	2556643	6/1985
FR	2570017	3/1986
GB	598204	2/1948
GB	1132708	11/1968
GB	2096844	10/1982
GB	2142571	1/1985

\* cited by examiner

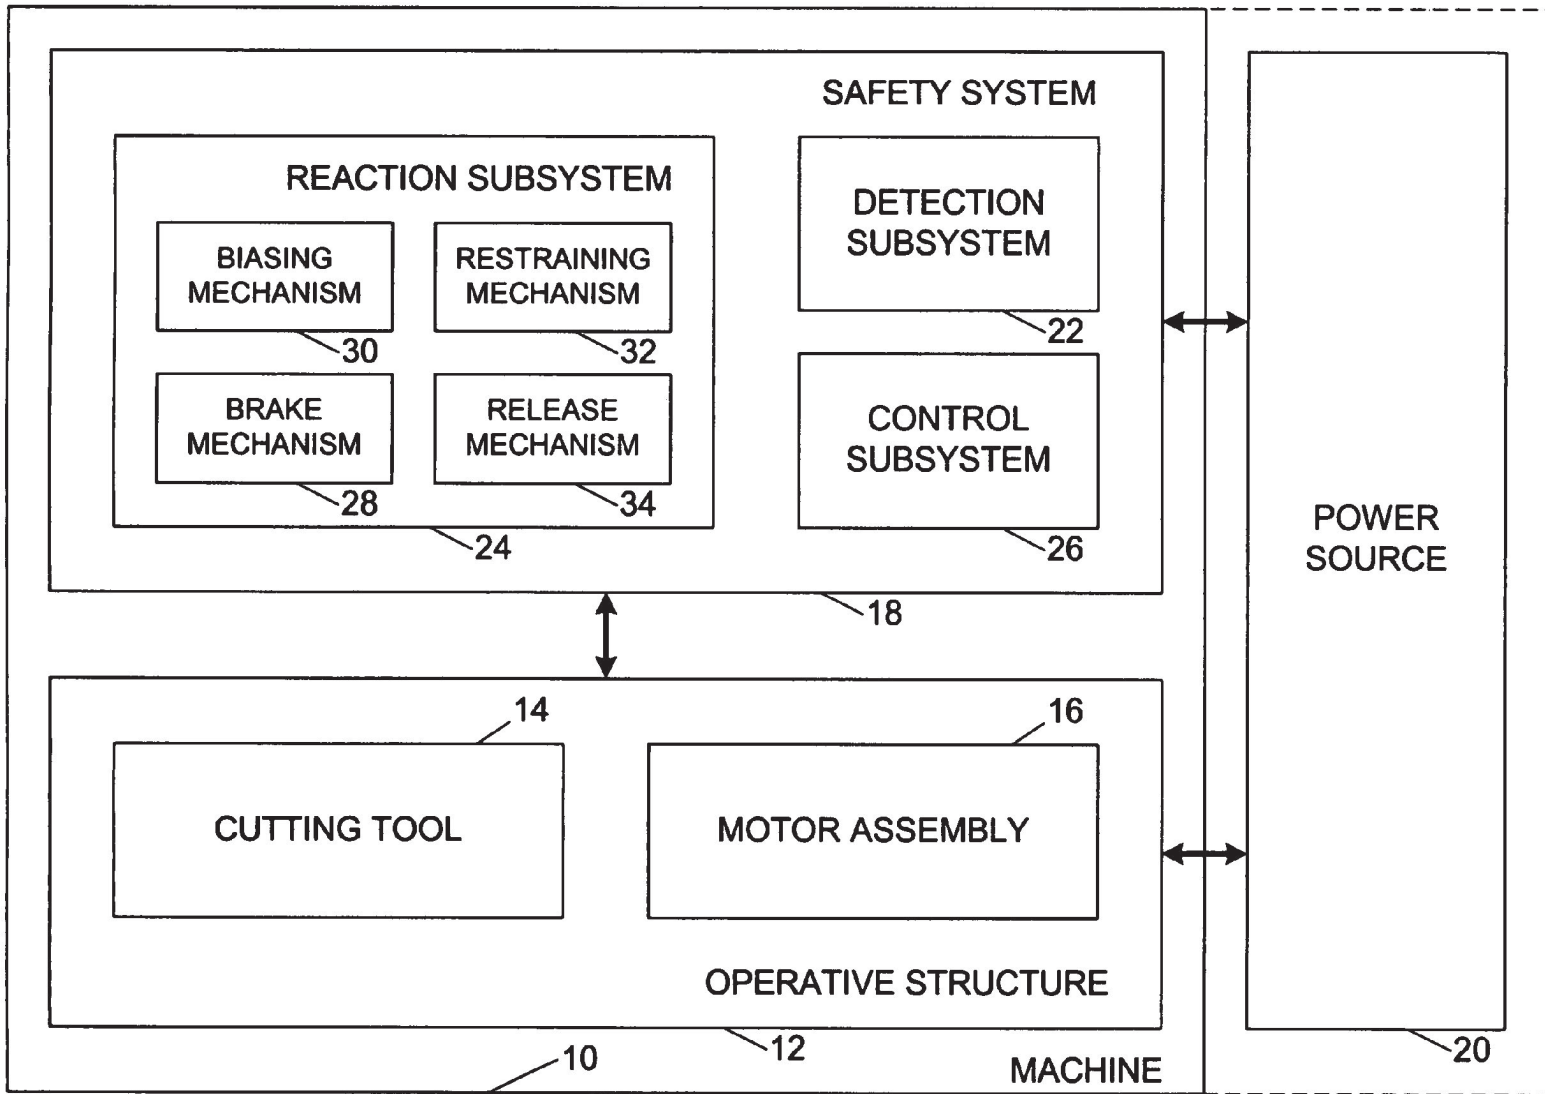
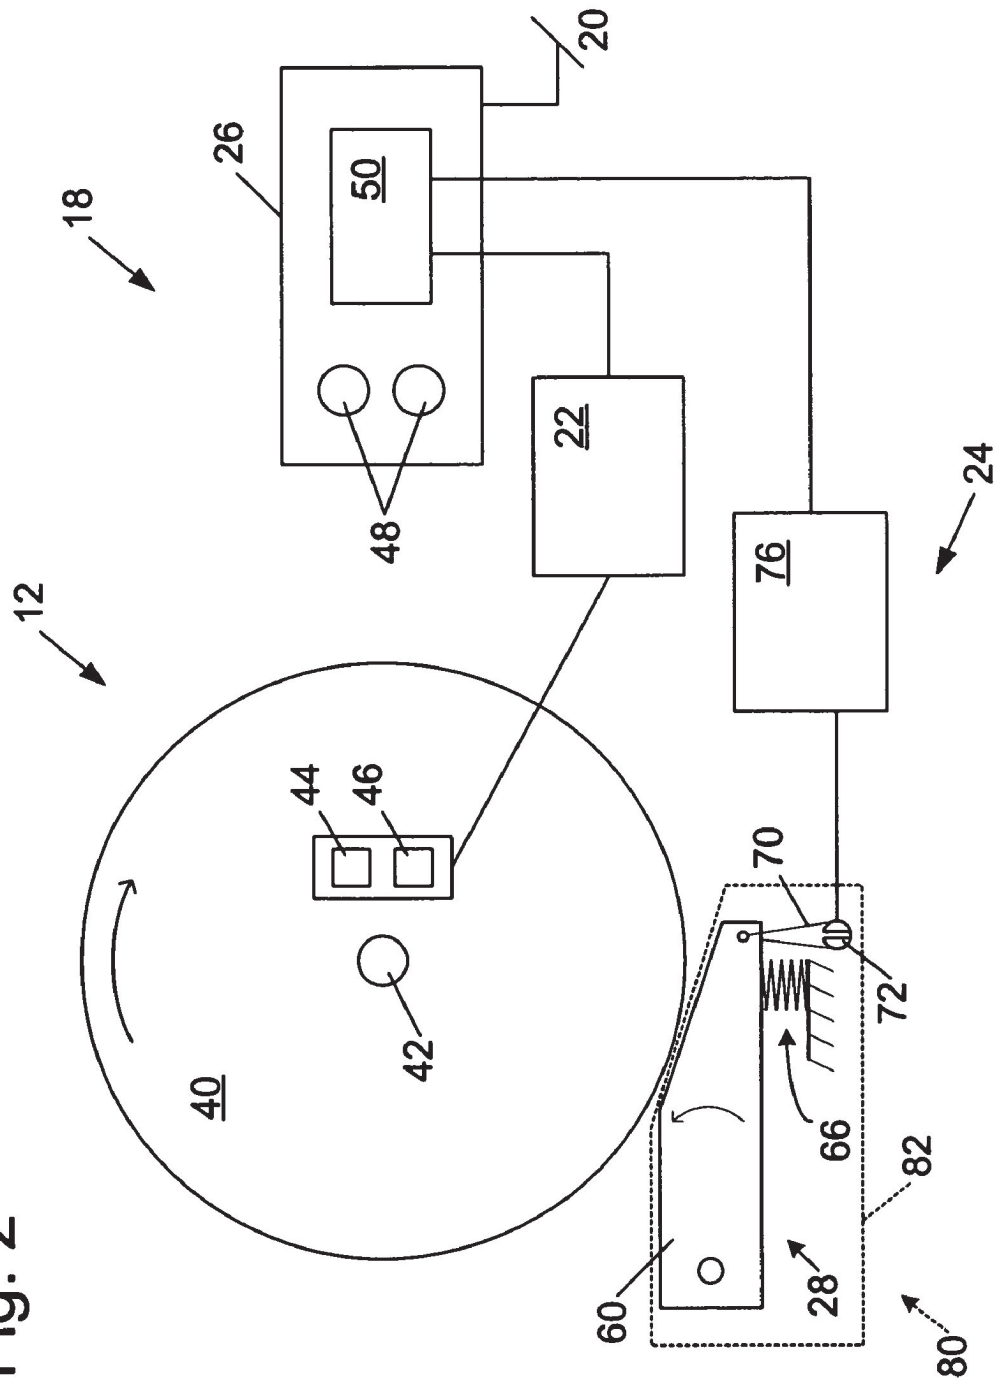


Fig. 1

Fig. 2



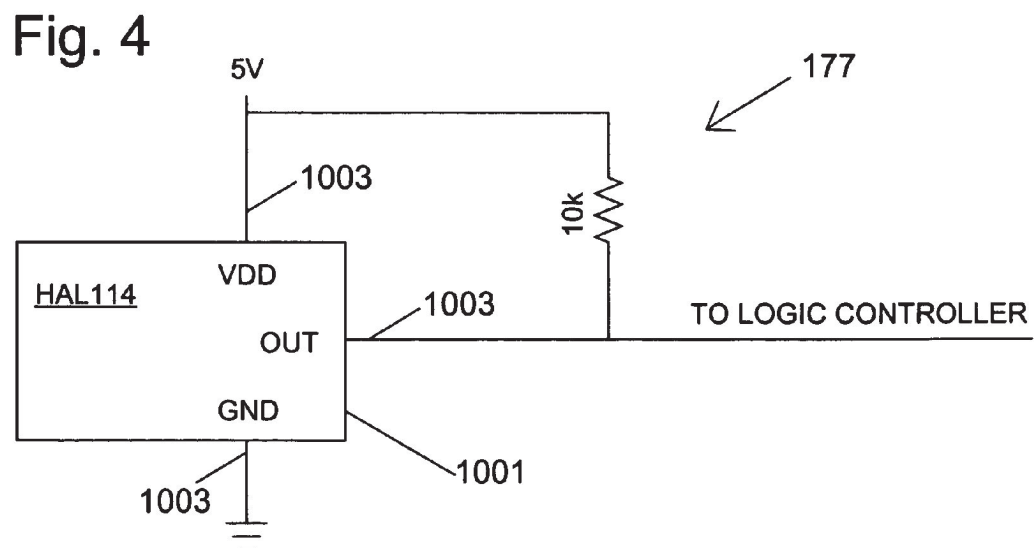
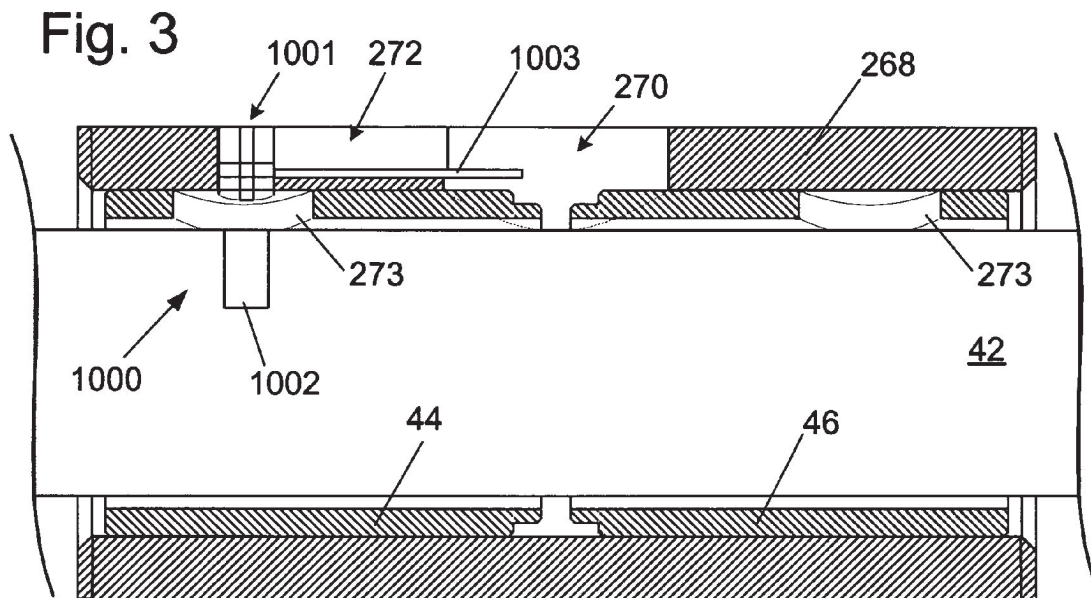


Fig. 5

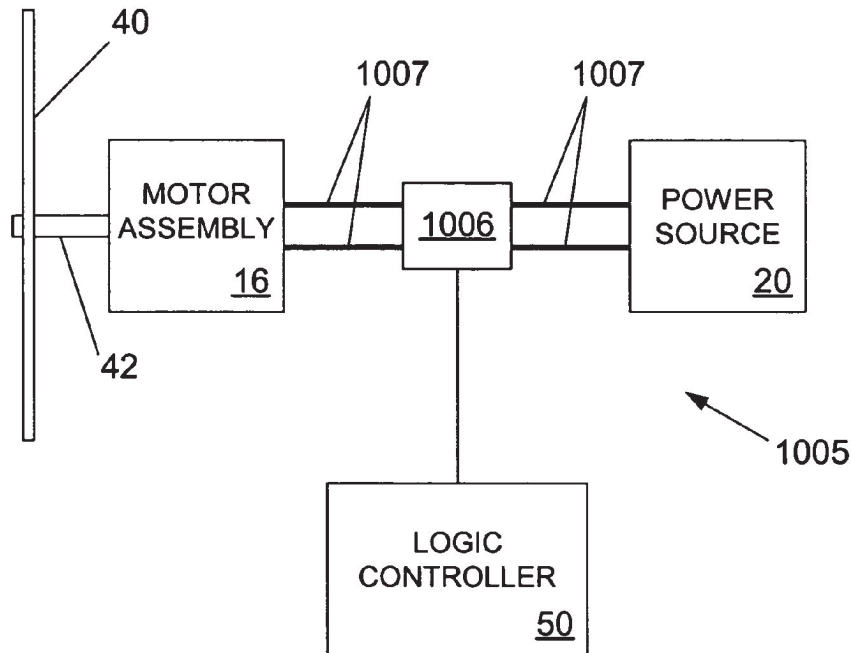


Fig. 6

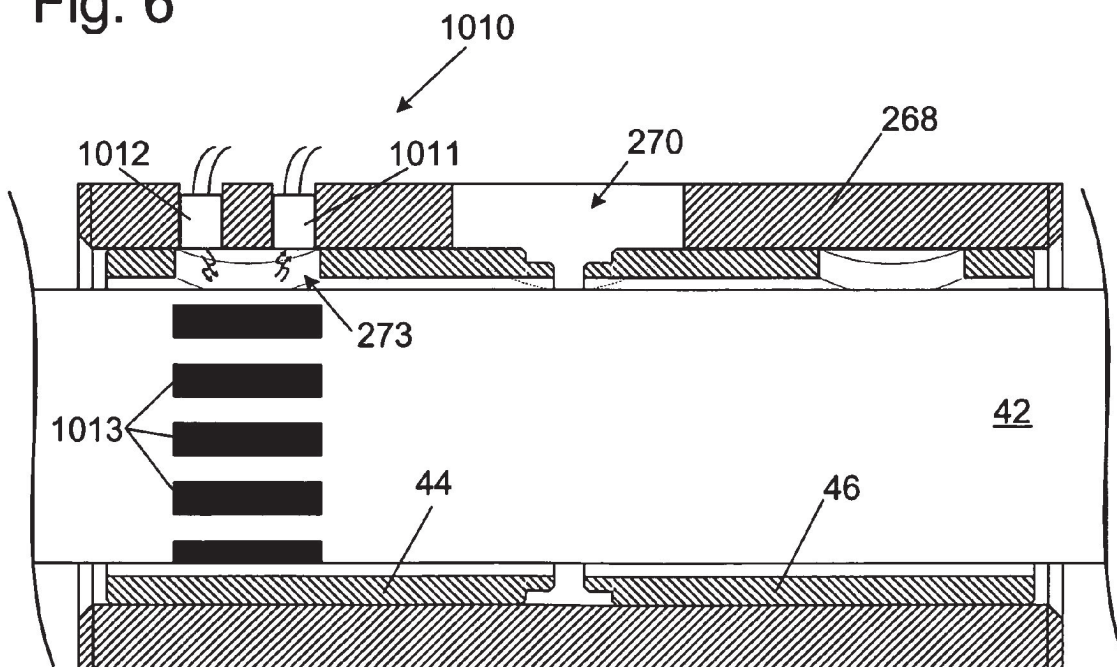


Fig. 7

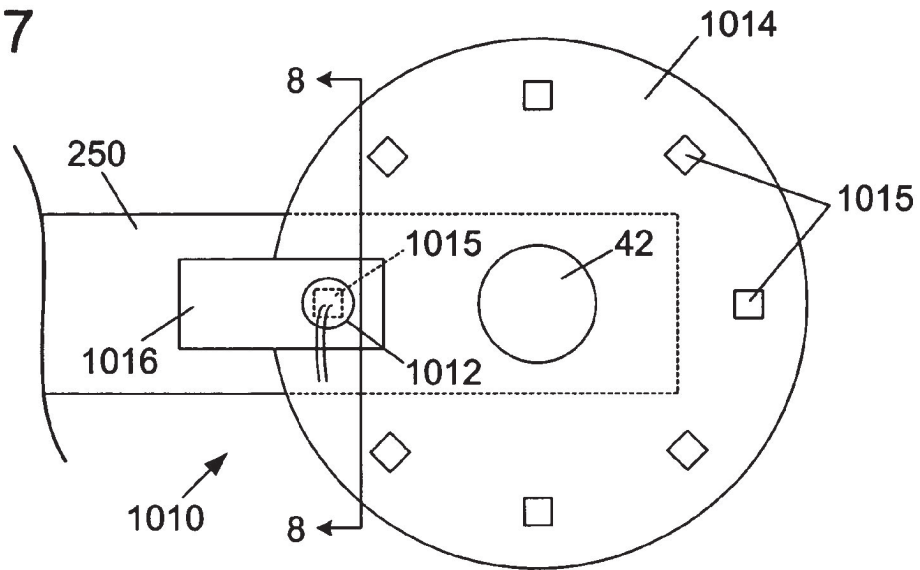


Fig. 8

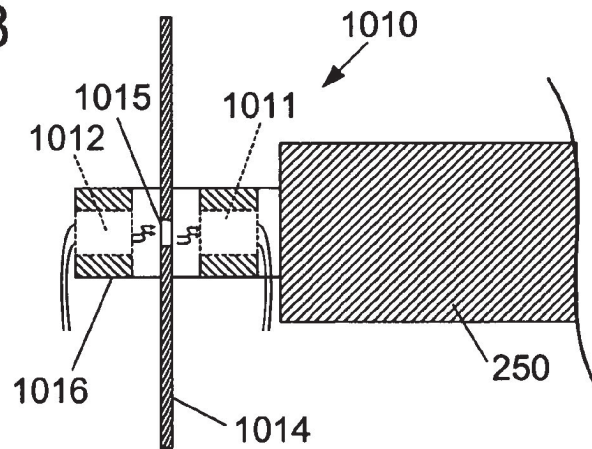


Fig. 9

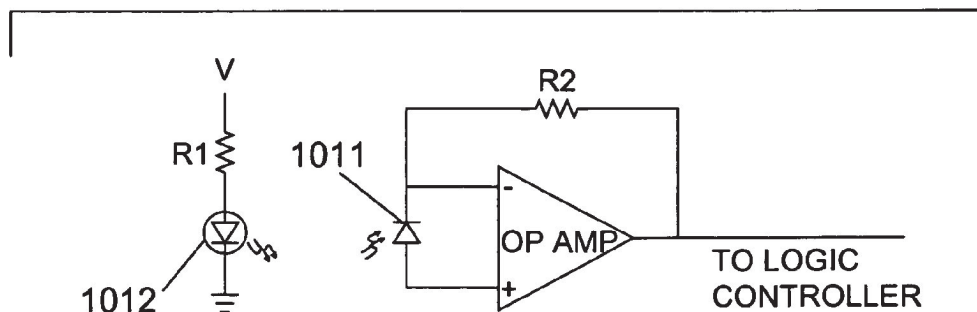


Fig. 10


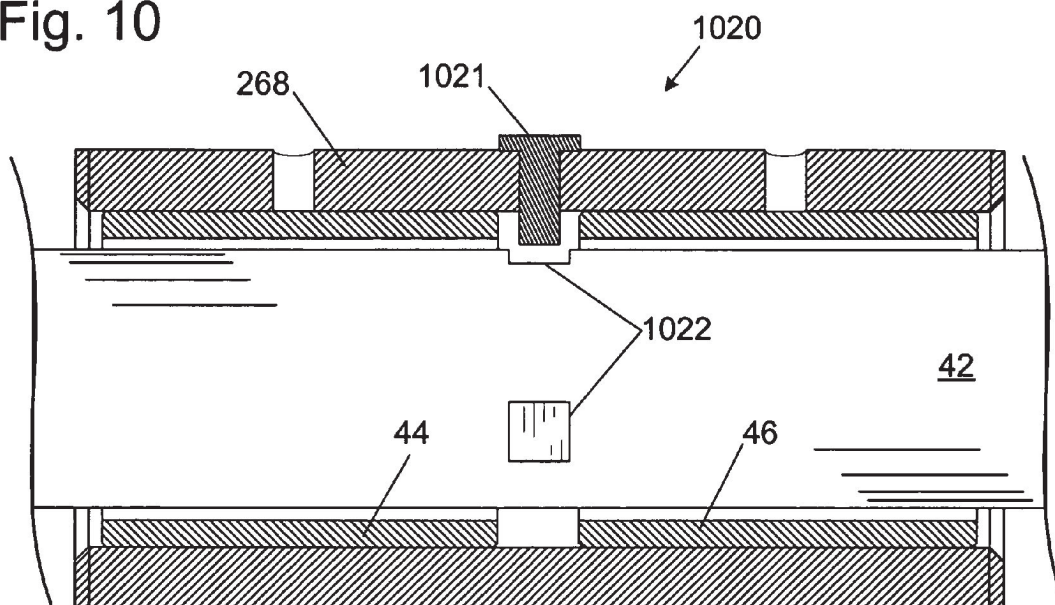


Fig. 11

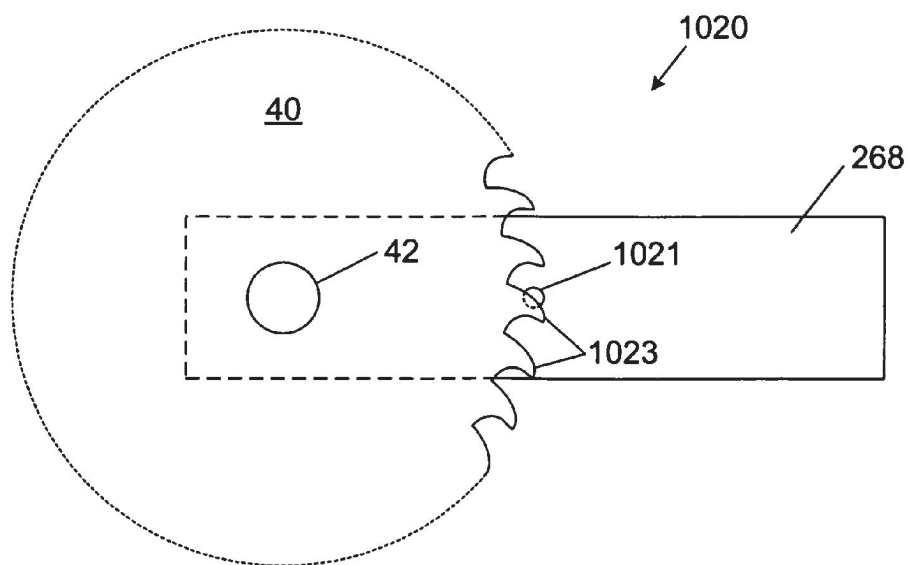

US 7,225,712 B2

1

# **MOTION DETECTING SYSTEM FOR USE IN A SAFETY SYSTEM FOR POWER EQUIPMENT**

## **CROSS-REFERENCE TO RELATED APPLICATIONS**

This application claims the benefit of and priority from the following U.S. Provisional Patent Applications: Ser. No. 60/225,056, filed Aug. 14, 2000, Ser. No. 60/225,057, filed Aug. 14, 2000, Ser. No. 60/225,058, filed Aug. 14, 2000, Ser. No. 60/225,059, filed Aug. 14, 2000, Ser. No. 60/225,089, filed Aug. 14, 2000, Ser. No. 60/225,094, filed Aug. 14, 2000, Ser. No. 60/225,169, filed Aug. 14, 2000, Ser. No. 60/225,170, filed Aug. 14, 2000, Ser. No. 60/225,200, filed Aug. 14, 2000, Ser. No. 60/225,201, filed Aug. 14, 2000, Ser. No. 60/225,206, filed Aug. 14, 2000, Ser. No. 60/225,210, filed Aug. 14, 2000, Ser. No. 60/225,211, filed Aug. 14, 2000, and Ser. No. 60/225,212, filed Aug. 14, 2000.

## **FIELD**

The present invention relates to safety systems, and more particularly to a high-speed safety system for use on power equipment.

## **BACKGROUND**

Beginning with the industrial revolution and continuing to the present, mechanized equipment has allowed workers to produce goods with greater speed and less effort than possible with manually-powered tools. Unfortunately, the power and high operating speeds of mechanized equipment creates a risk for those operating such machinery. Each year thousands of people are maimed or killed by accidents involving power equipment.

As might be expected, many systems have been developed to minimize the risk of injury when using power equipment. Probably the most common safety feature is a guard that physically blocks an operator from making contact with dangerous components of machinery, such as belts, shafts or blades. In many cases, guards are effective to reduce the risk of injury, however, there are many instances where the nature of the operations to be performed precludes using a guard that completely blocks access to hazardous machine parts.

Various systems have been proposed to prevent accidental injury where guards cannot effectively be employed. For instance, U.S. Pat. Nos. 941,726, 2,978,084, 3,011,610, 3,047,116, 4,195,722 and 4,321,841, the disclosures of which are incorporated herein by reference, all disclose safety systems for use with power presses. These systems utilize cables attached to the wrists of the operator that either pull back a user's hands from the work zone upon operation or prevent operation until the user's hands are outside the danger zone. U.S. Pat. Nos. 3,953,770, 4,075,961, 4,470,046, 4,532,501 and 5,212,621, the disclosures of which are incorporated herein by reference, disclose radio-frequency safety systems which utilize radio-frequency signals to detect the presence of a user's hand in a dangerous area of the machine and thereupon prevent or interrupt operation of the machine.

U.S. Pat. Nos. 4,959,909, 5,025,175, 5,122,091, 5,198,702, 5,201,684, 5,272,946, and 5,510,685 disclose safety systems for use with meat-skinning equipment, and are incorporated herein by reference. These systems interrupt or reverse power to the motor, or disengage a clutch, upon

2

contact with a user's hand by any dangerous portion of the machine. Typically, contact between the user and the machine is detected by monitoring for electrical contact between a fine wire mesh in a glove worn by the user and some metal component in the dangerous area of the machine.

U.S. Pat. Nos. 3,785,230 and 4,026,177, the disclosures of which are herein incorporated by reference, disclose a safety system for use on circular saws to stop the blade when a user's hand approaches the blade. The system uses the blade as an antenna in an electromagnetic proximity detector to detect the approach of a user's hand prior to actual contact with the blade. Upon detection of a user's hand, the system engages a brake using a standard solenoid. U.S. Pat. No. 4,117,752, which is herein incorporated by reference, discloses a similar braking system for use with a band saw, where the brake is triggered by actual contact between the user's hand and the blade.

It is often necessary for an equipment operator to touch the blade or other cutting device of power equipment when the blade or device is not moving (e.g., to adjust the blade, perform equipment maintenance, etc.). Thus, it would be desirable to disable the safety system when the blade is not moving since there is no danger to the user from contact with the blade.

## **BRIEF DESCRIPTION OF THE DRAWINGS**

FIG. 1 is a schematic block diagram of a machine with a fast-acting safety system according to the present invention.

FIG. 2 is a schematic diagram of an exemplary safety system in the context of a machine having a circular blade.

FIG. 3 is a partial cross-section view of an exemplary magnetic sensor assembly according to the present invention, where the arbor is not in cross-sectional view.

FIG. 4 is a schematic diagram of an exemplary circuit according to the present invention for use with a magnetic sensor assembly.

FIG. 5 is a schematic view of an exemplary EMF sensor assembly according to the present invention.

FIG. 6 is a partial cross-section view of an exemplary optical sensor assembly according to the present invention, where the arbor is not in cross-sectional view.

FIG. 7 is a side elevation of an alternative optical sensor assembly according to the present invention.

FIG. 8 is a cross-section view of the alternative optical sensor assembly of FIG. 7, taken generally along the line 8—8.

FIG. 9 is a schematic diagram of an exemplary circuit according to the present invention for use with an optical sensor assembly.

FIG. 10 is a partial cross-section view of an exemplary electrical sensor assembly according to the present invention, where the arbor is not in cross-sectional view.

FIG. 11 is a schematic side elevation of an alternative electrical sensor assembly according to the present invention.

## **DETAILED DESCRIPTION**

A machine is shown schematically in FIG. 1 and indicated generally at 10. Machine 10 may be any of a variety of different machines adapted for cutting workpieces, such as wood, including a table saw, miter saw (chop saw), radial arm saw, circular saw, band saw, jointer, planer, etc. Machine 10 includes an operative structure 12 having a cutting tool 14 and a motor assembly 16 adapted to drive the

US 7,225,712 B2

3

cutting tool. Machine 10 also includes a safety system 18 configured to minimize the potential of a serious injury to a person using machine 10. Safety system 18 is adapted to detect the occurrence of one or more dangerous conditions during use of machine 10. If such a dangerous condition is detected, safety system 18 is adapted to engage operative structure 12 to limit any injury to the user caused by the dangerous condition.

Machine 10 also includes a suitable power source 20 to provide power to operative structure 12 and safety system 18. Power source 20 may be an external power source such as line current, or an internal power source such as a battery. Alternatively, power source 20 may include a combination of both external and internal power sources. Furthermore, power source 20 may include two or more separate power sources, each adapted to power different portions of machine 10.

It will be appreciated that operative structure 12 may take any one of many different forms, depending on the type of machine 10. For example, operative structure 12 may include a stationary housing configured to support motor assembly 16 in driving engagement with cutting tool 14. Alternatively, operative structure 12 may include a movable structure configured to carry cutting tool 14 between multiple operating positions. As a further alternative, operative structure 12 may include one or more transport mechanisms adapted to convey a workpiece toward and/or away from cutting tool 14.

Motor assembly 16 includes one or more motors adapted to drive cutting tool 14. The motors may be either directly or indirectly coupled to the cutting tool, and may also be adapted to drive workpiece transport mechanisms. Cutting tool 14 typically includes one or more blades or other suitable cutting implements that are adapted to cut or remove portions from the workpieces. The particular form of cutting tool 14 will vary depending upon the various embodiments of machine 10. For example, in table saws, miter saws, circular saws and radial arm saws, cutting tool 14 will typically include one or more circular rotating blades having a plurality of teeth disposed along the perimetrical edge of the blade. For a jointer or planer, the cutting tool typically includes a plurality of radially spaced-apart blades. For a band saw, the cutting tool includes an elongate, circuitous tooth-edged band.

Safety system 18 includes a detection subsystem 22, a reaction subsystem 24 and a control subsystem 26. Control subsystem 26 may be adapted to receive inputs from a variety of sources including detection subsystem 22, reaction subsystem 24, operative structure 12 and motor assembly 16. The control subsystem may also include one or more sensors adapted to monitor selected parameters of machine 10. In addition, control subsystem 26 typically includes one or more instruments operable by a user to control the machine. The control subsystem is configured to control machine 10 in response to the inputs it receives.

Detection subsystem 22 is configured to detect one or more dangerous, or triggering, conditions during use of machine 10. For example, the detection subsystem may be configured to detect that a portion of the user's body is dangerously close to, or in contact with, a portion of cutting tool 14. As another example, the detection subsystem may be configured to detect the rapid movement of a workpiece due to kickback by the cutting tool, as is described in U.S. Provisional Patent Application Ser. No. 60/182,866, the disclosure of which is herein incorporated by reference. In some embodiments, detection subsystem 22 may inform control subsystem 26 of the dangerous condition, which then

4

activates reaction subsystem 24. In other embodiments, the detection subsystem may be adapted to activate the reaction subsystem directly.

Once activated in response to a dangerous condition, reaction subsystem 24 is configured to engage operative structure 12 quickly to prevent serious injury to the user. It will be appreciated that the particular action to be taken by reaction subsystem 24 will vary depending on the type of machine 10 and/or the dangerous condition that is detected. For example, reaction subsystem 24 may be configured to do one or more of the following: stop the movement of cutting tool 14, disconnect motor assembly 16 from power source 20, place a barrier between the cutting tool and the user, or retract the cutting tool from its operating position, etc. The reaction subsystem may be configured to take a combination of steps to protect the user from serious injury. Placement of a barrier between the cutting tool and teeth is described in more detail in U.S. Provisional Patent Application Ser. No. 60/225,206, entitled "Cutting Tool Safety System," filed Aug. 14, 2000 by SD3, LLC, the disclosure of which is herein incorporated by reference. Retraction of the cutting tool from its operating position is described in more detail in U.S. Provisional Patent Application Ser. No. 60/225,089, entitled "Retraction System For Use In Power Equipment," filed Aug. 14, 2000 by SD3, LLC, the disclosure of which is herein incorporated by reference.

The configuration of reaction subsystem 24 typically will vary depending on which action(s) are taken. In the exemplary embodiment depicted in FIG. 1, reaction subsystem 24 is configured to stop the movement of cutting tool 14 and includes a brake mechanism 28, a biasing mechanism 30, a restraining mechanism 32, and a release mechanism 34. Brake mechanism 28 is adapted to engage operative structure 12 under the urging of biasing mechanism 30. During normal operation of machine 10, restraining mechanism 32 holds the brake mechanism out of engagement with the operative structure. However, upon receipt of an activation signal by reaction subsystem 24, the brake mechanism is released from the restraining mechanism by release mechanism 34, whereupon, the brake mechanism quickly engages at least a portion of the operative structure to bring the cutting tool to a stop.

It will be appreciated by those of skill in the art that the exemplary embodiment depicted in FIG. 1 and described above may be implemented in a variety of ways depending on the type and configuration of operative structure 12. Turning attention to FIG. 2, one example of the many possible implementations of safety system 18 is shown. System 18 is configured to engage an operative structure having a cutting tool in the form of a circular blade 40 mounted on a rotating shaft or arbor 42. Blade 40 includes a plurality of cutting teeth (not shown) disposed around the outer edge of the blade. As described in more detail below, braking mechanism 28 is adapted to engage the teeth of blade 40 and stop the rotation of the blade. U.S. Provisional Patent Application Ser. No. 60/225,210, entitled "Translation Stop For Use In Power Equipment," filed Aug. 14, 2000 by SD3, LLC, the disclosure of which is herein incorporated by reference, describes other systems for stopping the movement of the cutting tool. U.S. Provisional Patent Application Ser. No. 60/225,058, entitled "Table Saw With Improved Safety System," filed Aug. 14, 2000 by SD3, LLC, and U.S. Provisional Patent Application Ser. No. 60/225,057, entitled "Miter Saw With Improved Safety System," filed Aug. 14, 2000 by SD3, LLC, the disclosures of which are herein incorporated by reference, describe safety system 18 in the context of particular types of machines 10.

US 7,225,712 B2

5

In the exemplary implementation, detection subsystem 22 is adapted to detect the dangerous condition of the user coming into contact with blade 40. The detection subsystem includes a sensor assembly, such as contact detection plates 44 and 46, capacitively coupled to blade 40 to detect any contact between the user's body and the blade. Typically, the blade, or some larger portion of cutting tool 14 is electrically isolated from the remainder of machine 10. Alternatively, detection subsystem 22 may include a different sensor assembly configured to detect contact in other ways, such as optically, resistively, etc. In any event, the detection subsystem is adapted to transmit a signal to control subsystem 26 when contact between the user and the blade is detected. Various exemplary embodiments and implementations of detection subsystem 22 are described in more detail in U.S. Provisional Patent Application Ser. No. 60/225,200, entitled "Contact Detection System For Power Equipment," filed Aug. 14, 2000 by SD3, LLC, and U.S. Provisional Patent Application Ser. No. 60/225,211, entitled "Apparatus And Method For Detecting Dangerous Conditions In Power Equipment," filed Aug. 14, 2000 by SD3, LLC, the disclosures of which are herein incorporated by reference.

Control subsystem 26 includes one or more instruments 48 that are operable by a user to control the motion of blade 40. Instruments 48 may include start/stop switches, speed controls, direction controls, etc. Control subsystem 26 also includes a logic controller 50 connected to receive the user's inputs via instruments 48. Logic controller 50 is also connected to receive a contact detection signal from detection subsystem 22. Further, the logic controller may be configured to receive inputs from other sources (not shown) such as blade motion sensors, workpiece sensors, etc. In any event, the logic controller is configured to control operative structure 12 in response to the user's inputs through instruments 48. However, upon receipt of a contact detection signal from detection subsystem 22, the logic controller overrides the control inputs from the user and activates reaction subsystem 24 to stop the motion of the blade. Various exemplary embodiments and implementations of control subsystem 26 are described in more detail in U.S. Provisional Patent Application Ser. No. 60/225,059, entitled "Logic Control For Fast Acting Safety System," filed Aug. 14, 2000 by SD3, LLC, the disclosure of which is herein incorporated by reference.

In the exemplary implementation, brake mechanism 28 includes a pawl 60 mounted adjacent the edge of blade 40 and selectively moveable to engage and grip the teeth of the blade. Pawl 60 may be constructed of any suitable material adapted to engage and stop the blade. As one example, the pawl may be constructed of a relatively high strength thermoplastic material such as polycarbonate, ultrahigh molecular weight polyethylene (UHMW) or Acrylonitrile Butadiene Styrene (ABS), etc., or a metal such as aluminum, etc. It will be appreciated that the construction of pawl 60 will vary depending on the configuration of blade 40. In any event, the pawl is urged into the blade by a biasing mechanism in the form of a spring 66. In the illustrative embodiment shown in FIG. 2, pawl 60 is pivoted into the teeth of blade 40. It should be understood that sliding or rotary movement of pawl 60 may also be used. The spring is adapted to urge pawl 60 into the teeth of the blade with sufficient force to grip the blade and quickly bring it to a stop.

The pawl is held away from the edge of the blade by a restraining mechanism in the form of a fusible member 70. The fusible member is constructed of a suitable material adapted to restrain the pawl against the bias of spring 66, and

6

also adapted to melt under a determined electrical current density. Examples of suitable materials for fusible member 70 include NiChrome wire, stainless steel wire, etc. The fusible member is connected between the pawl and a contact mount 72. Preferably, fusible member 70 holds the pawl relatively close to the edge of the blade to reduce the distance the pawl must travel to engage the blade. Positioning the pawl relatively close to the edge of the blade reduces the time required for the pawl to engage and stop the blade. Typically, the pawl is held approximately 1/32-inch to 1/4-inch from the edge of the blade by fusible member 70, however other pawl-to-blade spacings may also be used within the scope of the invention.

Pawl 60 is released from its unactuated, or cocked, position to engage blade 40 by a release mechanism in the form of a firing subsystem 76. The firing subsystem is coupled to contact mount 72, and is configured to melt fusible member 70 by passing a surge of electrical current through the fusible member. Firing subsystem 76 is coupled to logic controller 50 and activated by a signal from the logic controller. When the logic controller receives a contact detection signal from detection subsystem 22, the logic controller sends an activation signal to firing subsystem 76, which melts fusible member 70, thereby releasing the pawl to stop the blade. Various exemplary embodiments and implementations of reaction subsystem 24 are described in more detail in U.S. Provisional Patent Application Ser. No. 60/225,056, entitled "Firing Subsystem For Use In Fast Acting Safety System," filed Aug. 14, 2000 by SD3, LLC, U.S. Provisional Patent Application Ser. No. 60/225,170, entitled "Spring-Biased Brake Mechanism for Power Equipment," filed Aug. 14, 2000 by SD3, LLC, and U.S. Provisional Patent Application Ser. No. 60/225,169, entitled "Brake Mechanism For Power Equipment," filed Aug. 14, 2000 by SD3, LLC, the disclosures of which are herein incorporated by reference.

It will be appreciated that activation of the brake mechanism will require the replacement of one or more portions of safety system 18. For example, pawl 60 and fusible member 70 typically must be replaced before the safety system is ready to be used again. Thus, it may be desirable to construct one or more portions of safety system 18 in a cartridge that can be easily replaced. For example, in the exemplary implementation depicted in FIG. 2, safety system 18 includes a replaceable cartridge 80 having a housing 82. Pawl 60, spring 66, fusible member 70 and contact mount 72 are all mounted within housing 82. Alternatively, other portions of safety system 18 may be mounted within the housing. In any event, after the reaction system has been activated, the safety system can be reset by replacing cartridge 80. The portions of safety system 18 not mounted within the cartridge may be replaced separately or reused as appropriate. Various exemplary embodiments and implementations of a safety system using a replaceable cartridge are described in more detail in U.S. Provisional Patent Application Ser. No. 60/225,201, entitled "Replaceable Brake Mechanism For Power Equipment," filed Aug. 14, 2000 by SD3, LLC, and U.S. Provisional Patent Application Ser. No. 60/225,212, entitled "Brake Positioning System," filed Aug. 14, 2000 by SD3, LLC, the disclosures of which are herein incorporated by reference.

While one particular implementation of safety system 18 has been described, it will be appreciated that many variations and modifications are possible within the scope of the invention. Many such variations and modifications are described in U.S. Provisional Patent Application Ser. No. 60/182,866, filed Feb. 16, 2000 and U.S. Provisional Patent

US 7,225,712 B2

7

Application Ser. No. 60/157,340, filed Oct. 1, 1999, the disclosures of which are herein incorporated by reference.

As mentioned above, safety system **18** may include a sensor or sensor assembly for detecting motion of the blade or cutting tool. The sensor assembly typically is coupled to send a signal to logic controller **50** indicating whether the blade is in motion. The logic controller may be configured to respond differently to the detection of a dangerous condition based on whether the blade is moving. For example, it is often necessary for a user of machine **10** to touch blade **40** when preparing the machine for use, and when installing or removing the blade. Usually, the user would disconnect all power from machine **10** while performing such operations. However, in the event that the user neglects to disconnect the machine from power source **20** before touching the blade, logic controller **50** would receive a contact detection signal from detection subsystem **22**. If safety system **18** includes a blade motion sensor, then logic controller **50** may be configured not to actuate firing subsystem **76** when the blade is not moving. Instead, the logic controller may be configured to take one or more other actions such as disabling motor assembly **16**, sounding an alarm, displaying an error, etc. Alternatively, the logic controller may be configured to take no action if contact is detected while the blade is not moving.

In addition to detecting whether the blade is moving, safety system **18** may also be configured to determine the speed at which the blade is moving. This allows the logic controller to distinguish between rapid blade movement which could cause injury to the user, and slow blade movement which generally would not cause injury to the user. Thus, for example, a user could move the blade by hand without actuating firing subsystem **76**. In some embodiments, the blade motion sensor may be configured to determine relative blade speed. In alternative embodiments, logic controller **50** may be configured to analyze the signal from the blade motion sensor to determine relative blade speed.

It will be appreciated that the speed at which a blade is considered likely to cause injury will vary depending on the type of machine **10** and blade **40**. For example, a 14-inch carbide tooth blade on a table saw will cause serious injury at a lower speed than a 5 $\frac{3}{8}$ -inch plywood blade on a cordless trim saw. Thus, an embodiment of safety system **18** for use on the table saw may be configured to actuate the firing subsystem only at blade speeds above approximately 10, 25, 60, or 90 rpm, while an alternative embodiment of safety system **18** for use on the trim saw may be configured to actuate the firing subsystem only at blade speeds above approximately 40, 100, or 240 rpm.

Alternatively or additionally, the logic controller may be configured to interpret blade motion as being dangerous only when detected during or soon after motor assembly **16** was in operation. In other words, the blade motion detection would only be active while the blade was being moved by the motor assembly and during a relatively brief period afterward while the blade was coasting to a stop. Any blade motion detected at other times would be ignored.

Safety system **18** may include any of a wide variety of sensor assemblies to detect blade movement. Furthermore, each sensor assembly may be adapted as necessary depending on the particular type of blade **40** and/or the configuration of machine **10**. While several exemplary sensor assemblies are described herein, it will be understood that all methods and mechanisms suitable for automatically detecting the motion of a blade are within the scope of the invention.

8

One exemplary embodiment of safety system **18** includes a magnetic sensor assembly **1000** configured to detect movement of the blade. It will be appreciated that the blade movement may be detected by monitoring the blade or any other portion of the safety system that moves with the blade, including the arbor, bearings, motor assembly, arbor pulley, etc. In the exemplary implementation depicted in FIG. **3**, magnetic sensor assembly **1000** includes a Hall effect sensor **1001** and one or more magnets **1002**. A coil could also be used to detect magnetic field fluctuations from rotation. The magnets are mounted on arbor **42**. Sensor **1001** is mounted and configured to detect blade motion by detecting the movement of the magnets on the arbor. Sensor **1001** may be any suitable Hall effect sensor such as, for example, the sensor available from Micronas Intermetall of San Jose, Calif., under the part no. HAL114.

Hall effect sensor **1001** may be mounted adjacent the arbor by any suitable method. In the exemplary implementation, the sensor is mounted in a recessed region **272** of an insulating tube **268**. The insulating tube also supports charge plates **44** and **46**, as is described in more detail in U.S. Provisional Application Ser. No. 60/225,211, entitled "Apparatus and Method for Detecting Dangerous Conditions in Power Equipment," filed Aug. 14, 2000, by SD3, LLC. The recessed region is disposed at least partially over a hole **273** in charge plate **44**. Alternatively the recessed region may be disposed over a hole **273** in charge plate **46**. In any event, magnet **1002** is disposed on arbor **42** to pass beneath or adjacent hole **273** as the arbor rotates within the insulating tube. Hole **273** allows sensor **1001** to detect the field created by magnet **1002** as it passes. Sensor **1001** includes one or more connector leads **1003** connectable to receive power from, and transmit signals to, logic controller **50**.

Magnets **1002** may be mounted on the arbor in any suitable fashion. Typically, the magnets are mounted so as not to extend above the surface of the arbor. For example, the magnets may be press-fit and/or glued in a recess formed on the arbor. Alternatively, one or more of the magnets may be mounted to extend above the surface of the arbor. The size and number of magnets **1002** may be varied to control the signal produced by sensor **1001**. In alternative embodiments, magnets **1002** may be mounted at other locations such as an end of arbor **42**, on blade **40**, etc.

Sensor **1001** may be connected to send signals to logic controller **50** via any suitable circuitry. For example, FIG. **4** illustrates one exemplary rotation sense circuit **177** adapted to couple the signals from sensor **1001** to logic controller **50**. Those of skill in the art will appreciate that circuit **177** may be modified as needed for a particular application.

Another example of a suitable method for detecting blade motion is through electromagnetic field (EMF) measurements. As is known to those of skill in the art, when power to an electric motor is shut off, the motor will produce EMF pulses on the input power cables as the motor spins down. Thus, where blade **40** is driven by an electric motor assembly **16**, the blade may be assumed to be in motion whenever an EMF pulse is detected on the power supply cables, as well as whenever power is being supplied to the motor assembly.

Thus, in another exemplary embodiment depicted in FIG. **5**, safety system **18** includes an EMF sensor assembly **1005** configured to detect motion of blade **40**. Sensor assembly **1005** includes an EMF detection circuit **1006** disposed in the power supply path between motor assembly **16** and power source **20**. Circuit **1006** is adapted to monitor power cables **1007** which extend between the power source and the motor assembly, and to detect the presence of EMF pulses on the

US 7,225,712 B2

9

cables. Alternatively, circuit **1006** may be disposed at any other location suitable for detecting EMF pulses from motor assembly **16**. Circuit **1006** may be any circuit or mechanism adapted to detect EMF pulses, such as are known to those of skill in the art. Circuit **1006** is also coupled to logic controller **50**, and adapted to convey a signal to the logic controller indicating the presence and/or absence of EMF pulses on cables **1007**. Optionally, circuit **1006** and/or logic controller **50** may be adapted to analyze the detected EMF emissions, and evaluate the speed of blade **40**. In such case, the logic controller may be configured not to actuate firing subsystem **76** when the speed of the blade is unlikely to cause serious injury to the user.

In another exemplary embodiment, safety system **18** includes an optical sensor assembly adapted to optically detect movement of blade **40**. Safety system **18** may be configured to optically detect blade motion in a variety of ways. For example, a rotary optical encoder may be coupled to the arbor to detect rotation of the arbor. Any rotary encoder may be used, such as those available from Omron Electronics Inc., of Schaumburg, Ill. Alternatively, other optical sensor assemblies may be used as described below.

Typically, the optical sensor assembly will be at least partially enclosed to prevent saw dust or other debris from interfering with the detection. One exemplary implementation of an optical sensor assembly is indicated generally at **1010** in FIG. **6**. Sensor assembly **1010** includes an optical detector **1011** adapted to detect light from an optical source **1012**. Alternatively, plural optical sources and/or plural optical detectors may be used. It will be appreciated that any of a variety of different optical sources may be used which are known to those of skill in the art, including an incandescent or fluorescent bulb, light emitting diode (LED), laser diode, etc. Similarly, any of a variety of different optical detectors may be used which are known to those of skill in the art, including a photodiode, phototransistor, etc.

In any event, the optical source is arranged so that the signal received at the optical detector when the blade is moving is different than the signal received when the blade is stationary. For example, the source and detector may be arranged so that a signal is received only when the blade is moving, or only when the blade is stationary. Alternatively, source **1012** and detector **1011** may be arranged so that the amount of emitted light that reaches the detector varies when the blade is in motion.

The implementation depicted in FIG. **6** uses this latter arrangement. Sensor assembly **1010** includes an LED **1012** mounted in insulating tube **268** to emit light through hole **273** in charge plate **44** or **46**. The light reflects off arbor **42** and is detected by a photodiode **1011** which is also mounted in insulating tube **268** adjacent hole **273**. The arbor includes one or more reduced-reflection regions **1013** adapted to reduce the amount of light reflected to photodiode **1011**. Regions **1013** may be formed by coating the arbor with a light-absorbing coating, roughening the arbor to cause random scattering of the light, etc. In any event, the reduced reflecting regions create a varying signal at the photodiode when the arbor is rotating. In contrast, a constant signal is produced at the photodiode when the arbor is stationary.

The minimal clearance between arbor **42** and charge plates **44**, **46** tends to maintain the space between the arbor and the photodiode/LED relatively free of debris which could block the signal. Alternatively, the insulating tube assembly may be sealed in a protective housing (not shown).

In another alternative implementation depicted in FIGS. **7** and **8**, optical sensor assembly **1010** includes a barrier member **1014** mounted on the arbor and disposed between

10

photodiode **1011** and LED **1012**. Alternatively, the barrier member may be mounted on any other portion of cutting tool **14** or motor assembly **16** adapted to move with the blade. Barrier member **1014** includes one or more light-transmitting regions or holes **1015**, which may take any desired shape or size. The photodiode and LED are mounted in a support member **1016** attached to an arbor block **250**, and disposed on either side of barrier member **1014**. The photodiode is aligned so that emitted light will pass through holes **1015**. Likewise, the LED is aligned to detect the light which passes through the holes. Thus, as arbor **42** rotates, light from the LED is alternately blocked and transmitted by the barrier member, thereby creating a varying signal at the photodiode.

Photodiode **1011** and LED **1012** may be connected to any suitable driving circuitry such as are known to those of skill in the art. FIG. **9** shows one exemplary circuitry for producing an optical signal at LED **1012** and detecting the signal at photodiode **1011**. The particular values of the circuit components and voltage supplies may be selected as desired for a specific application. In any event, the photodiode is coupled to transmit a signal to logic controller **50** to indicate whether blade **40** is moving.

In another exemplary embodiment, safety system **18** includes an electrical sensor assembly adapted to electrically detect movement of blade **40**. There are numerous methods and mechanisms for electrically detecting blade movement within the scope of the invention. The particular method and/or mechanism selected will typically depend on the specific type and configuration of machine **10**. For example, where charge plate **46** is configured to capacitively detect a signal induced in the blade, any incidental eccentricity in the blade or the blade rotation will cause the capacitance between the blade and charge plate **46** to vary as the blade rotates. As a result, charge plate **46** will detect a varying signal amplitude when the blade is rotating. Thus, a single sensor may be configured to detect both contact with the user and rotation of the blade. Preferably, the incidental variation fluctuation is insufficient in magnitude and/or rate of change to trigger reaction subsystem **24**.

Rather than rely on incidental eccentricities, safety system **18** may include an exemplary electrical sensor assembly adapted to detect a signal variation caused by a designed eccentricity or non-uniformity in the blade. Alternatively, the sensor assembly may be adapted to detect the signal from an eccentricity in some portion of cutting tool **14** that moves with the blade and is electrically coupled to the blade. One exemplary implementation of such a sensor assembly is indicated generally at **1020** in FIG. **10**. Sensor assembly **1020** includes a detection electrode **1021** capacitively coupled to detect an electrical signal on arbor **42**. Electrode **1021** may be mounted in any suitable fashion to provide electrical insulation from arbor **42** as well as the remainder of cutting tool **14** and machine **10**. In the exemplary implementation, electrode **1021** is mounted in insulating tube **268** and arranged to extend to a point closely adjacent the arbor between charge plates **44** and **46**. Sensor assembly **1020** also includes one or more eccentricities **1022** disposed on the arbor and substantially aligned with electrode **1021** so as to pass by the electrode as the arbor rotates.

It will be appreciated that eccentricities **1022** may be configured in any desired quantity, size, shape or form adapted to cause a variation in the capacitance between the arbor and the electrode as the arbor rotates. In the exemplary implementation, eccentricities **1022** take the form of beveled regions formed on the surface of arbor **42**. Thus, the space between the electrode and the arbor is greater (and therefore

## US 7,225,712 B2

11

the capacitance is less) when an eccentricity is positioned beneath the electrode than when an eccentricity is not positioned beneath the electrode. Alternatively, eccentricities **1022** may take other forms adapted to vary the capacitance between the arbor and electrode, including raised regions, dielectric pads, etc. In any event, if an electrical signal is induced in the arbor (e.g., by charge plate **44** of contact detection subsystem **22**), then electrode **1021** will detect variations in that signal if the arbor is rotating. Conversely, the electrode will detect no variations in the signal if the arbor is stationary.

Turning attention now to FIG. **11**, another exemplary implementation of electrical sensor assembly **1020** is shown in which electrode **1021** is disposed adjacent the teeth **1023** of blade **40**. Electrode **1021** may be mounted on arbor block **250** or any other suitable portion of machine **10**. Additionally, the electrode may be positioned at the side of the blade (as shown in FIG. **11**) or at the perimeter of the blade facing in toward the arbor. The size, shape and position of the electrode may vary depending on the position and size of teeth **1023**. In any event, as teeth **1023** pass by electrode **1021**, the capacitance between the blade and the electrode varies, thereby varying the amplitude of the signal detected by the electrode. Alternatively, a plurality of electrodes may be positioned at various points adjacent the teeth so that blade motion would be detected by modulations in the relative signal amplitudes at the electrodes. Such an alternative detection mechanism may also be used with other implementations of sensor assembly **1020**.

While a few exemplary magnetic, EMF, optical and electrical sensor assemblies have been described for detecting blade motion, it will be appreciated that many modifications and variations to such sensor assemblies are included within the scope of the invention. Furthermore, safety system **18** may include other types of motion detection sensors such as mechanical sensors, sonic and ultra-sonic sensors, etc. In any event, the invention provides effective and reliable means for discriminating between conditions which are, and are not, likely to cause injury to a user of power machinery.

It is believed that the disclosure set forth above encompasses multiple distinct inventions with independent utility. While each of these inventions has been disclosed in its preferred form, the specific embodiments thereof as disclosed and illustrated herein are not to be considered in a limiting sense as numerous variations are possible. The subject matter of the inventions includes all novel and non-obvious combinations and subcombinations of the various elements, features, functions and/or properties disclosed herein. No single feature, function, element or property of the disclosed embodiments is essential to all of the disclosed inventions. Similarly, where the claims recite "a" or "a first" element or the equivalent thereof, such claims should be understood to include incorporation of one or more such elements, neither requiring nor excluding two or more such elements.

It is believed that the following claims particularly point out certain combinations and subcombinations that are directed to one of the disclosed inventions and are novel and non-obvious. Inventions embodied in other combinations and subcombinations of features, functions, elements and/or properties may be claimed through amendment of the present claims or presentation of new claims in this or a related application. Such amended or new claims, whether they are directed to a different invention or directed to the same invention, whether different, broader, narrower or

12

equal in scope to the original claims, are also regarded as included within the subject matter of the inventions of the present disclosure.

The invention claimed is:

1. A woodworking machine comprising:

a support;

a movable blade coupled to the support;

a control system configured to detect a dangerous condition between a person and the blade by imparting an electric signal to the blade and monitoring the electric signal for at least one change indicative of the dangerous condition; and

a brake mechanism triggerable by the control system to stop movement of the blade upon detection of the dangerous condition by the control system;

where the control system is further configured to determine if the blade is moving, and configured not to trigger the brake mechanism if the blade is not moving.

2. The woodworking machine of claim 1, where the blade is coupled to the support by a rotatable arbor, and where the control system is configured to determine if the blade is moving by detecting whether the arbor is rotating.

3. The woodworking machine of claim 1, where the control system includes a magnetic sensor adapted to determine if the blade is moving.

4. The woodworking machine of claim 3, where the magnetic sensor includes a Hall effect sensor.

5. The woodworking machine of claim 1, where the control system includes an electronic sensor adapted to determine if the blade is moving.

6. The woodworking machine of claim 5, where the electronic sensor includes a capacitive sensor.

7. The woodworking machine of claim 1, where the control system includes an optical sensor adapted to determine if the blade is moving.

8. A woodworking machine comprising:

a working portion adapted to work when moving;

a detection system adapted to detect a dangerous condition between a person and the working portion by imparting an electric signal to the working portion and monitoring the electric signal for at least one change indicative of the dangerous condition;

a reaction system associated with the detection system to cause a predetermined action to take place relative to the working portion upon detection of the dangerous condition; and

a motion detection system adapted to detect motion of the working portion and to disable the reaction system when the working portion is not moving.

9. The woodworking machine of claim 8, where the working portion is a spinning blade and where the motion detection system detects whether the blade is spinning.

10. The woodworking machine of claim 8, where the motion detection system detects the speed of the motion and considers the working portion to be not moving if the working portion is moving below a threshold speed.

11. The woodworking machine of claim 8, where the motion detection system includes a sensor.

12. The woodworking machine of claim 11, where the sensor is a Hall effect sensor.

13. The woodworking machine of claim 11, where the sensor is an electromagnetic field sensor.

14. The woodworking machine of claim 11, where the sensor is an optical sensor.

15. The woodworking machine of claim 11, where the sensor is an electrical sensor.

US 7,225,712 B2

13

16. The woodworking machine of claim 8, where the working portion is a cutter, where the reaction system is a brake system, and where the predetermined action is to engage and stop the cutter.

17. A woodworking machine comprising:

a working portion adapted to work when moving;

a motor to move the working portion;

a detection system adapted to detect a dangerous condition between a person and the working portion by imparting an electric signal to the working portion and monitoring the electric signal for at least one change indicative of the dangerous condition; and

a reaction system associated with the detection system to cause a predetermined action to take place relative to the working portion upon detection of the dangerous condition;

where the detection system and reaction system are configured to function when the motor is moving the working portion and for a defined period of time after the motor has been turned off, and where the reaction system is configured not to cause the predetermined action to take place after the defined period of time has past until the motor starts moving the working portion.

18. A woodworking machine comprising:

a cutting tool;

a motor to spin the cutting tool;

14

a detection system adapted to detect a dangerous condition between a person and the cutting tool by imparting an electric signal to the cutting tool and monitoring the electric signal for at least one change indicative of the dangerous condition;

a reaction system associated with the detection system to cause a predetermined action to take place relative to the working portion upon detection of the dangerous condition; and

a control system adapted to monitor the detection system and control actuation of the reaction system, where the control system is adapted to trigger the reaction system if the dangerous condition is detected when the motor is spinning the cutting tool or during coast-down of the cutting tool after the motor is turned off and to deactivate the reaction system after coast-down.

19. The woodworking machine of claim 18, where the reaction system is a brake system, and where the predetermined action is to engage and stop the culling tool.

20. The woodworking machine of claim 18, where the control system is adapted to re-activate the reaction system when the motor starts spinning the cutting tool after deactivation of the reaction system.

\* \* \* \* \*

UNITED STATES PATENT AND TRADEMARK OFFICE  
**CERTIFICATE OF CORRECTION**

PATENT NO. : 7,225,712 B2  
APPLICATION NO. : 09/929234  
DATED : June 5, 2007  
INVENTOR(S) : Stephen F. Gass et al.

Page 1 of 1

It is certified that error appears in the above-identified patent and that said Letters Patent is hereby corrected as shown below:

In the Claims

Column 13, in claim 17, line 19, delete "past" and insert --Passed--.

Column 14, in claim 18, line 11, delete "the working portion" and insert --the cutting tool--.

Signed and Sealed this  
Twenty-second Day of September, 2015



Michelle K. Lee  
*Director of the United States Patent and Trademark Office*